



Machine that combines two functions: automatic mould loading and mould heating.
 There are two versions:
 charger 175 for Tuttuno 4 nozzles
 charger 275 for Tuttuno 9 nozzles
 Completely electric, it is controlled by the Tuttuno display.
 Mold loader for Tuttuno 4 (version 175) and for Tuttuno 9 (version 275)
 The mould is heated for better performance in the subsequent filling with the Tuttuno 4 or 9 nozzles.
 The heating of the molds occurs thanks to the introduction of hot air whose temperature is regulated by the Tuttuno display.
 Applicable to all Tuttuno machines produced from January 2024;
 For previous Tuttuno machines it is possible to purchase a special adaptation kit; for further information contact technical assistance. technicalservice@selmi-group.it.

Mechanical characteristics

Overall dimensions CHARGER 175
 Overall dimensions CHARGER 275
 Empty weight
 Material in contact with food
 Gaskets


[mm] (LxWxH) 1300X510X1400
 [mm] (LxWxH) 1300X610X1400
 [kg] 90 / 120
 inox AISI 304 L
 PTFE

Electrical characteristics

Total installed power
 Supply voltage
 Number of phases
 Frequency
 Enclosure degree of protection
 Connection type: industrial plug

[kW] 2
 [VAC] 220
 3
 [Hz] 50 / 60
 IP65
 16A - 3 poles

CHARGER 175

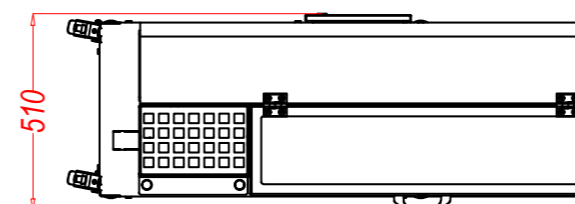

CHARGER 275

